



BS 5EN

PENDANT SEPAKER



Description BS 5EN is a pendant speaker suitable for all those installations where high intelligibility for alarm messages broadcasting and great sound reproduction quality are required. Thanks to its IP65 protection grade, it can be installed both indoor and outdoor. Moreover, a modern and endearing design makes it the perfect product for environments where projectors are intended also as architectural elements and contribute to improve global aesthetics.

- Features**
- › 5" coaxial woofer with 0.75" dome tweeter.
 - › Power selectable (100 V): 20 W - 10 W - 5 W - 2.5 W.
 - › 88 dB sensitivity.
 - › Colour white RAL 9016.
 - › Flameproof ABS body, steel grille.
 - › In/out ceramic terminal block.
 - › Thermal fuse protection.
 - › Protection grade IP65.
 - › 5 m cable included.

Part Number 13133078 BS 5EN


White - RAL 9016 EAN 8024530011147



BS 5EN

PENDANT SEPAKER

Line Art 2D

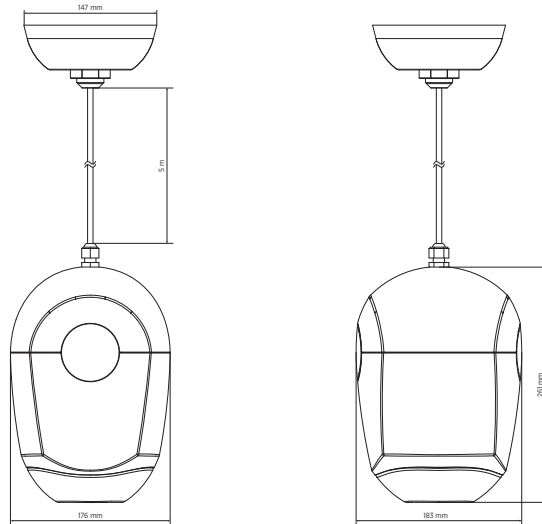

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB) Max SPL @ 1m Max SPL @ 4m Coverage angle System Sensitivity System Sensitivity 1W @ 4m	80 Hz ÷ 20000 Hz 101 dB 89 dB 170° 88 dB 76 dB
Power section	Amplification Power Handling Peak Power Handling Protections	Full Range 20 W 80 W PEAK Thermal fuse
Transducers	Dome Tweeter Woofers	1 x 0.75" 1 x Coaxial 5.0"
Input/Output section	Input connectors Output connectors Constant Voltage Transformer Power selection 1 Power selection 2 Power selection 3 Power selection 4	Ceramic screw terminals Ceramic screw terminals 100 V 20 W - 500 ohm 10 W - 1000 ohm 5 W - 2000 ohm 2.5 W - 4000 ohm
Standard compliance	IP protection grade Safety agency EN54-24 certified CPR number	IP 65 CE compliant Yes 0068-CPR-058/2014
Physical specifications	Cabinet/Case Material Hardware Grille Color	ABS Wall mount metal plate and 5m cable Steel White - RAL 9016



BS 5EN

PENDANT SEPAKER

Size / Weight

Height	261 mm / 10.28 inches
Width	176 mm / 6.93 inches
Depth	183 mm / 7.2 inches
Weight	2.79 kg / 6.15 lbs