




# HDL 26-A

## ACTIVE TWO WAY LINE ARRAY MODULE

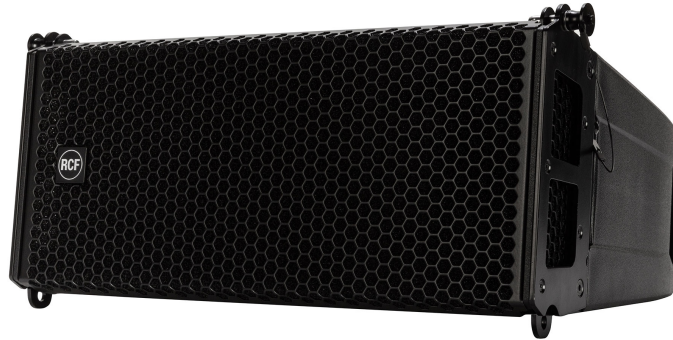

**Description** The RCF HDL26-A is an ultra-compact bi-amped two-way active touring system for small and medium-sized events, both indoors and outdoors. Due to the advanced transducer design and the 2000W Class-D amplifier, among the best in its class, it is capable of an extended bottom-end and a pristine sound for a wide range of applications, alone or in RDNet managed line-array configurations. The HDL 35-AS is the ideal flyable bass complement for the HDL 26-A array system.

- Features**
- › 133 dB Max SPL
  - › 2000W Two-Way Amplifier
  - › Exclusive FIRPHASE technology on-board
  - › 750 Hz Crossover for best vocal reproduction
  - › RDNet Networked Management
  - › 3" Titanium Compression Driver
  - › 2 x 6" High-Powered Neodymium Woofers
  - › 4 PATH waveguide


<b>Part Number</b>	13000588 HDL 26-A	90-240 V	Black	EAN 8024530016845
	13000606 HDL 26-A W	90-240 V	White	EAN 8024530017422
	13000917 HDL 26-A UK	240 V	Black	EAN 8024530022464



# HDL 26-A

## ACTIVE TWO WAY LINE ARRAY MODULE

Line Art 2D

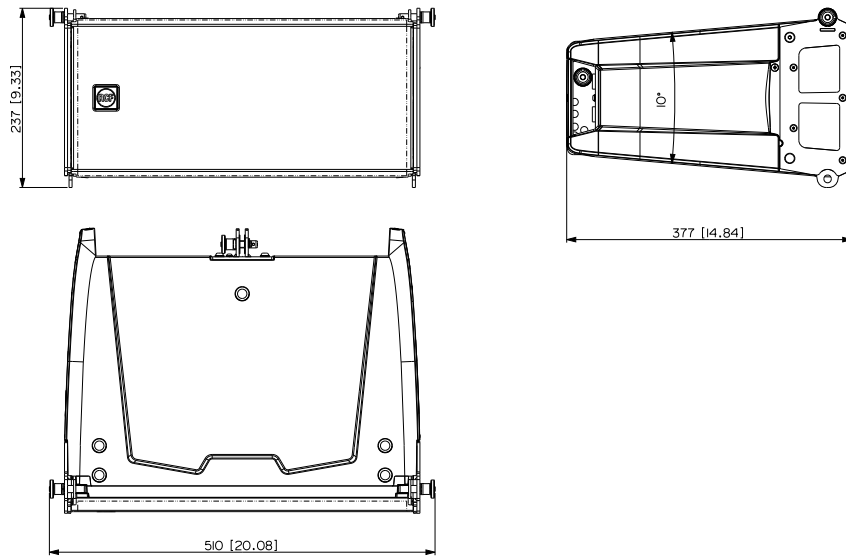

### TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response	55 Hz ÷ 20000 Hz
	Max SPL @ 1m	133 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	10°
<b>Transducers</b>	Compression Driver	1 x 1.5" neo, 3.0" v.c
	Woofer	2 x 6.0" neo, 2.0" v.c
<b>Input/Output section</b>	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	+4 dBu
<b>Processor section</b>	Crossover Frequencies	750
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Preset, RDNet bypass
	RDNet	Yes
<b>Power section</b>	Total Power	2000 W Peak, 1000 W RMS
	High frequencies	600 W Peak, 300 W RMS
	Low frequencies	1400 W Peak, 700 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
<b>Standard compliance</b>	Safety agency	CE compliant
<b>Physical specifications</b>	Cabinet/Case Material	PP Composite
	Hardware	Array fittings
	Handles	2 Back
	Grille	Steel
	Color	Black, White
<b>Size</b>	Height	237 mm / 9.33 inches
	Width	470 mm / 18.5 inches
	Depth	377 mm / 14.84 inches
	Weight	13.5 kg / 29.76 lbs



# HDL 26-A

## ACTIVE TWO WAY LINE ARRAY MODULE

	<b>ACCESSORIES</b>			
<b>Cables</b>	AC XLR 3M3F	13360102	8024530006402	
	CBL ETHERCON 0.7M	12399016	8024530013844	
	CBL ETHERCON 1.5M	12399017	8024530013851	
	CBL ETHERCON 3M	12399035	8024530013868	
	CBL ETHERCON 5M	12399018	8024530013875	
	CBL ETHERCON TO XLR F 0.2M	12399019	8024530013882	
	CBL ETHERCON TO XLR M 0.2M	12399020	8024530013899	
	CBL LK 25 MULTIPIN 10M	12399023	8024530013837	
	CBL LK 25 MULTIPIN 20M	12399022	8024530013820	
	CBL LKS 19 ARRAY FANOUT	12399024	8024530013905	
	CBL LKS 19 BREAKOUT	12399026	8024530013929	
	CBL LKS 19 POWER 10M	12399027	8024530013936	
	CBL LKS 19 POWER 20M	13360146	8024530013943	
	CBL LKS 19 SUB FANOUT	12399025	8024530013912	
	CBL LKS 25-2 FANOUT	12399021	8024530013813	
	CBL POWER BOX 6X	13360145	8024530015534	
	CBL POWERCON LINK 0.7M	12399031	8024530013738	
	CBL POWERCON LINK 1.5M	12399030	8024530013721	
	CBL POWERCON LINK 10M	12399028	8024530013707	
	CBL POWERCON LINK 5M	12399029	8024530013714	
	POWER CABLE X6 TTL 55-A	13360138		
	<b>Protections</b>	RP 1X HDL 6	13360381	8024530015169
	<b>Rigging / Mounting</b>	AZM-BR 2X	13360351	8024530013516
CL-BR HDL 6		13360371	8024530014360	
FL-B HDL 6		13360360	8024530014209	
FL-B HDL 6		13360373	8024530014377	
FL-B LINK HDL 6-12 2X		13360375	8024530014414	
FL-B PK HDL 6		13360372	8024530014353	
HOIST SPACING CHAIN CH 001		13360129	8024530020774	
PM-KIT 3X HDL 6		13360377	8024530014629	
QL-PIN 008		13360626	8024530020897	
<b>Transportation</b>		KRT-WH 6X HDL 6	13360366	8024530014421