

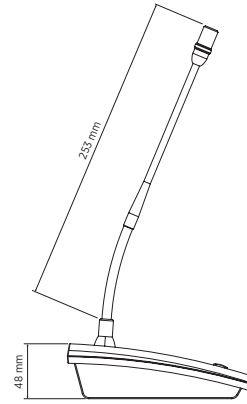


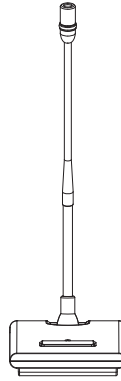

BM 3001

PAGING MICROPHONE

Line Art 2D



TECHNICAL SPECIFICATIONS

Microphone specifications

Directivity	Cardioid
Sensitivity	-65 dB
Frequency Response (-3dB)	50 Hz ÷ 18 kHz
Minimum load impedance (ohm)	470.00 ohm
Nominal output voltage @3.3 kohm (mV RMS)	100.00 mV RMS
Phantom power	Yes
Phantom Power	18 V DC - 48 V DC

Console specifications

Console Type	Paging
General call	Yes
Number of zones	1
LED indicators	Yes

Power requirement

Power consumption	2.80 mA
-------------------	---------

Connections

Connectors	RJ45
------------	------

Functionalities

Smart PTT	Yes
-----------	-----

Accessories

Cable included	Yes
Cable length (m)	5

Size

Height	48 mm / 1.89 inches
Width	100 mm / 3.94 inches
Depth	159 mm / 6.26 inches
Weight	0.73 kg / 1.61 lbs