



HDL 20-A

ACTIVE LINE ARRAY MODULE




Description	<p>The careful acoustic design, no compromise transducers and a unique, composite cabinet, design make the HDL 20-A the preferred tool of many professionals. Perfect in live sound reinforcement and reliable installed situations.</p> <p>The HDL 20-A is the ideal choice when line array performance is needed and a fast and easy set up is a must. The system is powered from a 1400 Watt Peak Power 2 way digital amplifier, sound is processed from a powerful DSP. The processing includes cluster and HF projection correction and special new presets for indoor and high curving situations. The system features state of the art RCF transducers, two powerful 10" for a solid bass reproduction and a large format 3" voice coil compression driver to deliver vocal clarity and high definition with an incredible dynamic.</p> <p>The HDL 18-AS is the ideal flyable bass complement for the HDL 20-A array system.</p>			
Features	<ul style="list-style-type: none"> › 1400 Watt Peak power - 700 Watt RMS › 135 dB max SPL › 55 Hz 20 kHz frequency response › 2 x 10" Woofers › 1 x 3" Compression Driver › DSP controlled Input section with selectable presets › Tour grade safe and solid variable mechanics › Composite PP enclosure structurally wooden reinforced 			
Part Number	<p>13040007 HDL 20-A 13040008 HDL 20-A</p>	<p>220-240 V 115 V</p>	<p>Black</p>	<p>EAN 8024530009960 EAN 8024530009977</p>



HDL 20-A

ACTIVE LINE ARRAY MODULE

Line Art 2D

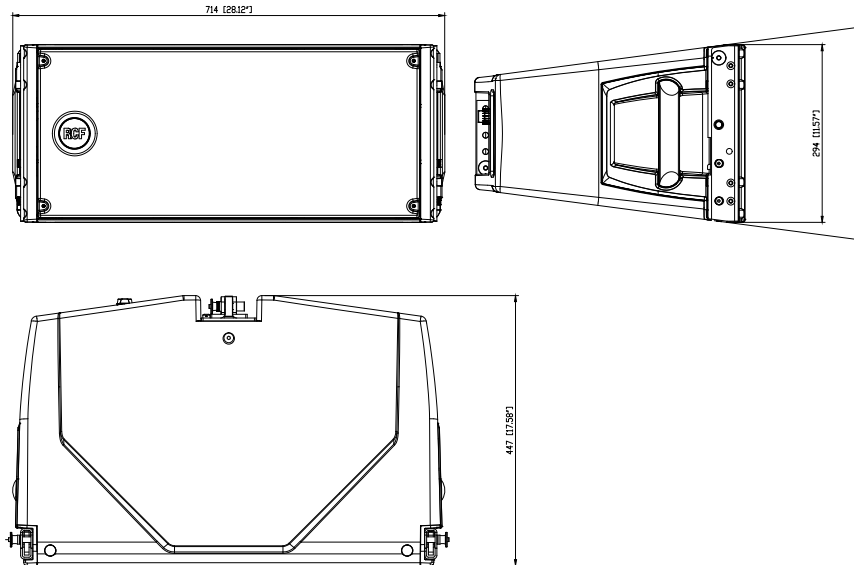

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	55 Hz ÷ 20000 Hz
	Max SPL @ 1m	135 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	15°
Transducers	Compression Driver	1 x 2.0", 3.0" v.c
	Woofer	2 x 10", 2.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	800 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Cluster, HF, High curving, Indoor
Power section	Total Power	1400 W Peak, 700 W RMS
	High frequencies	400 W Peak, 200 W RMS
	Low frequencies	1000 W Peak, 500 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
	Standard compliance	Safety agency
Physical specifications	Cabinet/Case Material	PP Composite
	Hardware	Rigging flyware
	Handles	2 side, 2 back
	Grille	Steel
	Color	Black,
Size / Weight	Height	294 mm / 11.57 inches
	Width	705 mm / 27.76 inches
	Depth	445 mm / 17.52 inches
	Weight	30.2 kg / 66.58 lbs



HDL 20-A

ACTIVE LINE ARRAY MODULE

Rigging / Mounting	ACCESSORIES		
	AZIMUT BRACKETS		
	13360351 AZM-BR 2X	Black	EAN 8024530013516
	FLY BARS		
	13360218 FL-B HDL 20-18	Black	EAN 8024530013967
	FLY BARS LIGHT		
	13360229 FL-B LGT HDL 20	Black	EAN 8024530010225
	FLY BARS PICKUP		
	13360221 FL-B PK HDL 20-18	Black	EAN 8024530018221
	QUICK LOCK PINS		
	13360626 QL-PIN 008	Black	EAN 8024530020897
	13360627 QL-PIN 009	Black	EAN 8024530020903
	13360634 QL-PIN 011	Black	EAN 8024530022433
SUSPENSION CHAINS			
13360129 HOIST SPACING CHAIN CH 001	Black	EAN 8024530020774	
Protections	RAIN PROTECTIONS		
	13360283 RP 2X HDL 20	Black	EAN 8024530015886
Transportation	KART WITH WHEELS		
	13360223 KRT-WH 4X HDL 20	Black	EAN 8024530014018
Cables	CABLES KIT		
	13360102 AC XLR 3M3F		EAN 8024530006402
	12399023 CBL LK 25 MULTIPIN 10M	Black	EAN 8024530013837
	12399022 CBL LK 25 MULTIPIN 20M	Black	EAN 8024530013820
	12399024 CBL LKS 19 ARRAY FANOUT	Black	EAN 8024530013905
	12399026 CBL LKS 19 BREAKOUT	Black	EAN 8024530013929
	12399027 CBL LKS 19 POWER 10M	Black	EAN 8024530013936
	13360146 CBL LKS 19 POWER 20M		EAN 8024530013943
	12399025 CBL LKS 19 SUB FANOUT	Black	EAN 8024530013912
	12399021 CBL LKS 25-2 FANOUT	Black	EAN 8024530013813
	13360145 CBL POWER BOX 6X	Black	EAN 8024530015534
	12399031 CBL POWERCON LINK 0.7M	Black	EAN 8024530013738
	12399030 CBL POWERCON LINK 1.5M	Black	EAN 8024530013721
	12399028 CBL POWERCON LINK 10M	Black	EAN 8024530013707
	12399029 CBL POWERCON LINK 5M	Black	EAN 8024530013714
	13360138 POWER CABLE X6 TTL 55-A		