

P 3115T

WEATHERPROOF COAXIAL TWO WAY SPEAKER

DESCRIPTION

The P 3115T is a weatherproof full range, wide-dispersion, coaxial two-way loudspeaker system for a variety of professional indoor or outdoor applications. The speaker can be installed individually or coupled in array configurations. The low-frequency transducer is a 15" woofer with a 3" voice coil. The high-frequency section combines a 1.3" RCF Precision compression driver with a 2.5" diaphragm assembly centrally mounted in the throat of the LF driver and loaded on a constant directivity CMD horn for smooth, wide dispersion. The P 3115T features a selectable line transformer for 70 - 100 volt applications, built-in LICC crossover, and Active Mosfet Compression Driver Protection (AMCDP). The single-piece roto-molded cabinet is fully UV protected and meets IP-55 standard requirements, equipped with M10 brass inserts (12x), and a durable and corrosion-resistant 316P stainless steel U-Bracket with spacers (2x) for 90° mounting. The aluminum grille cover is powder coated with water-repellent backing material and has a rotatable logo plate.



FEATURES

- 300 W RMS power handling
- 129 dB max SPL
- 75 Hz ÷ 20000 Hz frequency range
- 15" neodymium woofer, 2.5" v.c.
- 1.75" v.c. neodymium compression driver
- 90° x 60° constant directivity
- Weatherproof IP55 cabinet with UV protection
- Aluminum grille
- AISI 316L stainless steel bracket
- Built in 100V line transformer

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	75 Hz ÷ 20000 Hz
	Max SPL @ 1m	129 dB
	Horizontal coverage angle	90°
	Vertical coverage angle	60°
	Directivity index Q	13
	System Sensitivity	98 dB
Power section	Amplification	Full Range
	Nominal Impedance	16 ohm
	Power Handling	300 W
	Peak Power Handling	1200 W PEAK
	Protections	Dynamic active mosfet
	Crossover Frequencies	1300 Hz
Transducers	Compression Driver	1.0", 1.5" v.c
	Woofer	Coaxial 15", 2.5" v.c
Input/Output section	Input connectors	Neoprene Cable
	Constant Voltage Transformer	100 V
	Power selection 1	120 W - 83 ohm
	Power selection 2	60 W - 167 ohm
	Power selection 3	30 W - 333 ohm
Standard compliance	IP protection grade	IP 55
	Safety agency	CE compliant
Physical specifications	Hardware	12 x M10 inserts + U-brackets and pair of spacers
	Color	Grey, White - RAL 9003
Size	Height	463 mm / 18.23 inches
	Width	463 mm / 18.23 inches
	Depth	433 mm / 17.05 inches
	Weight	18.4 kg / 40.57 lbs
Shipping information	Package Height	530 mm / 20.87 inches
	Package Width	490 mm / 19.29 inches
	Package Depth	490 mm / 19.29 inches
	Package Weight	23.2 kg / 51.15 lbs



PART NUMBER

- **13100082**
P 3115T W

EAN 8024530017514

- **13000135**
P 3115T


EAN 8024530008307





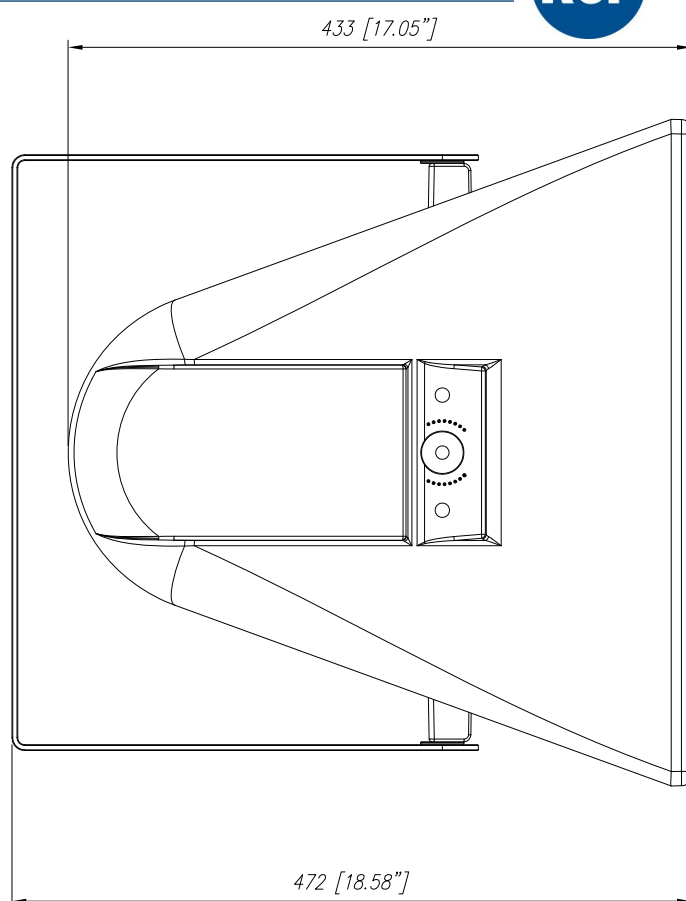
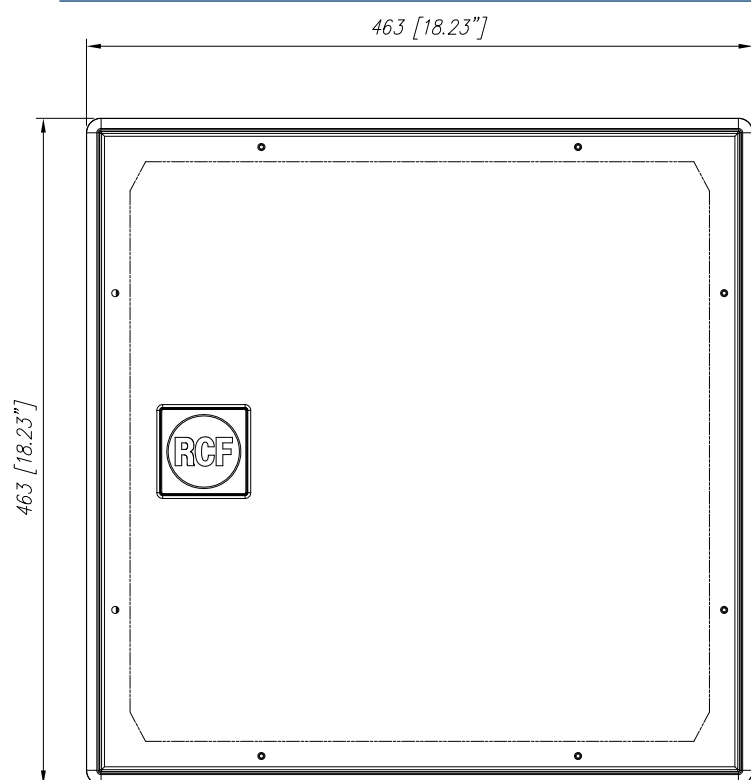














P3115

P6215

P8015

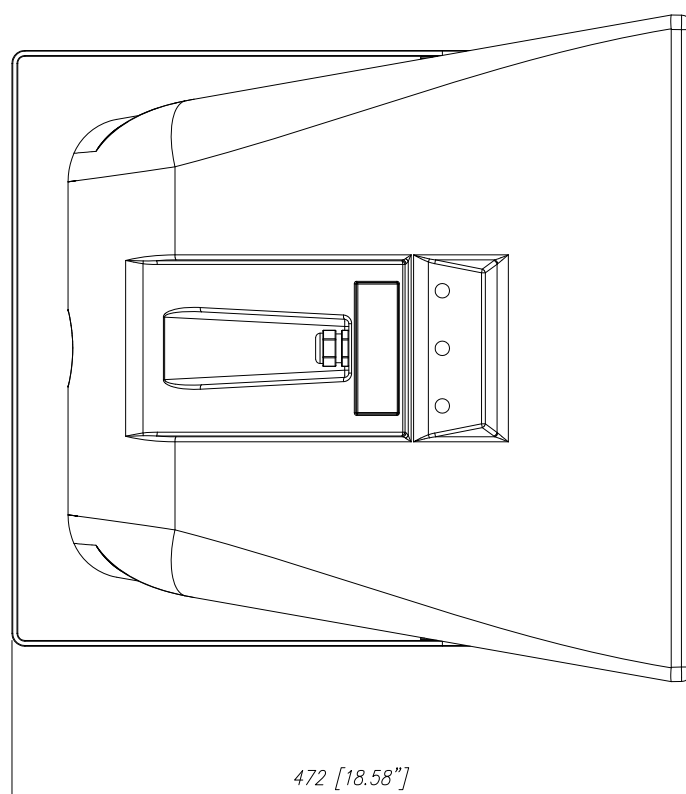

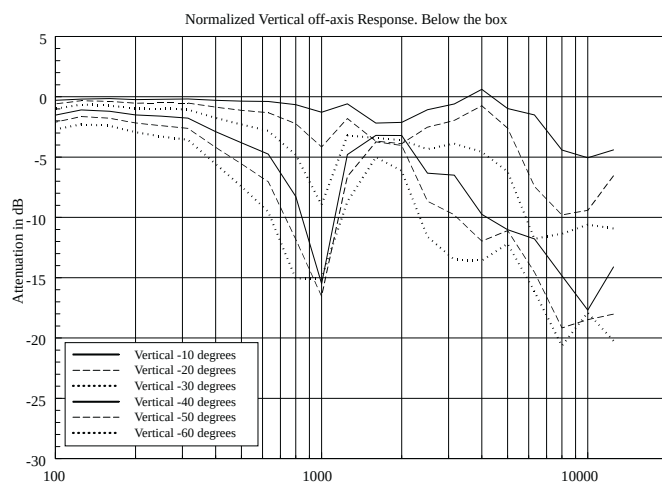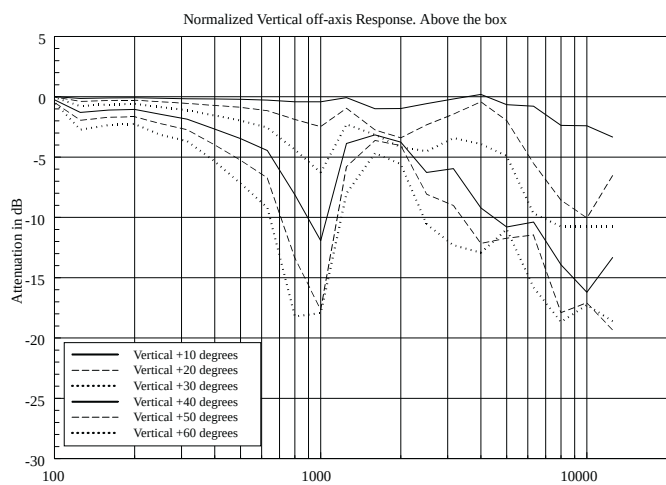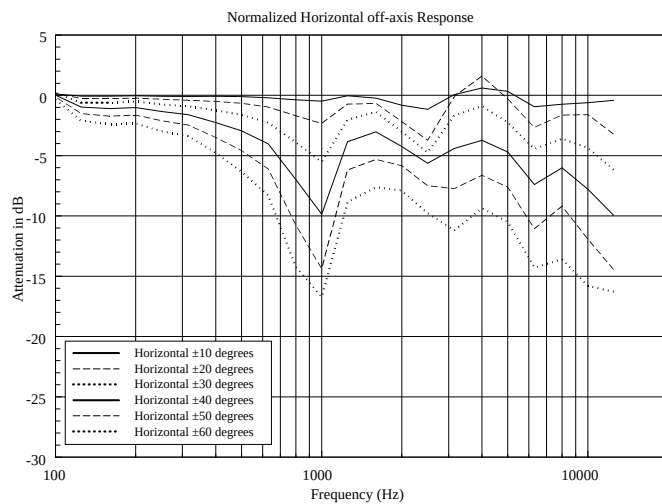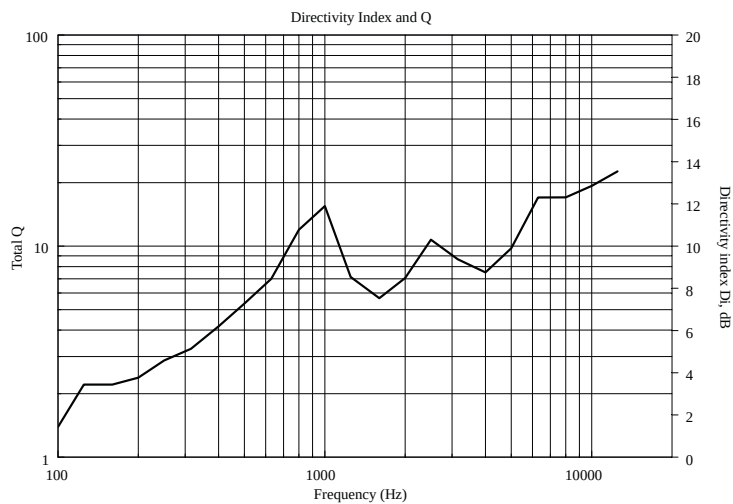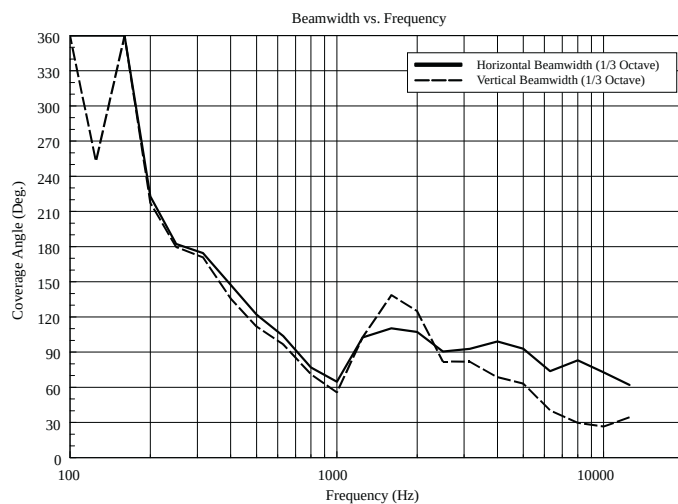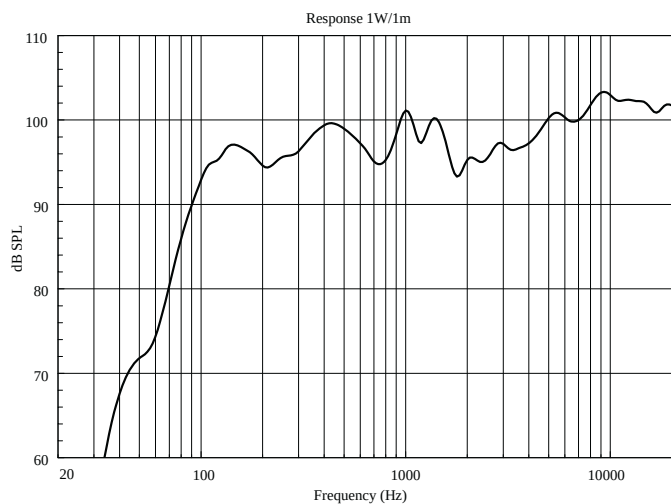

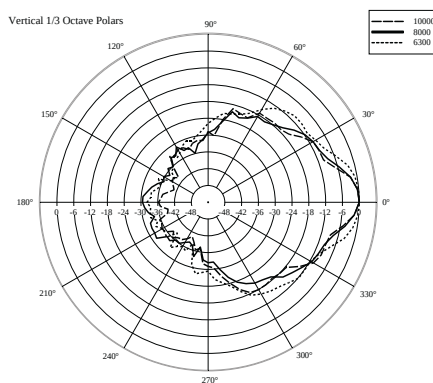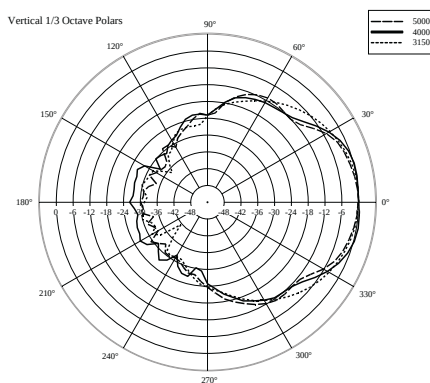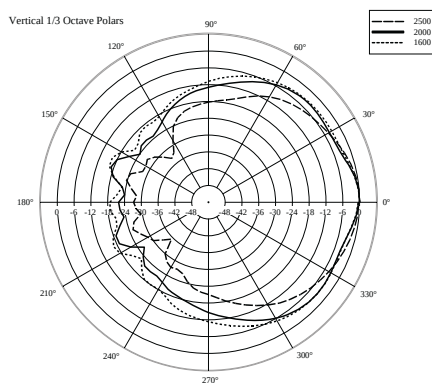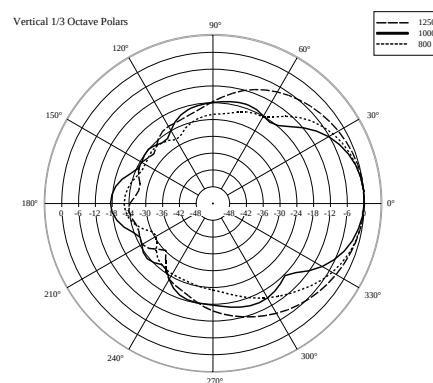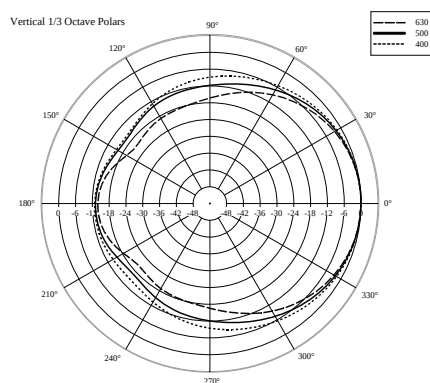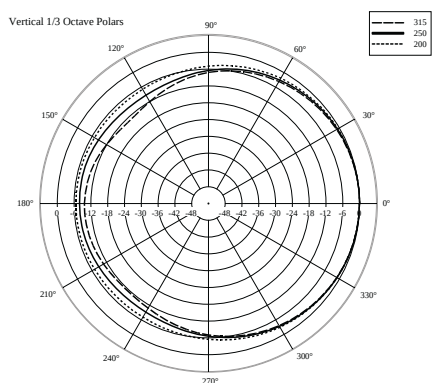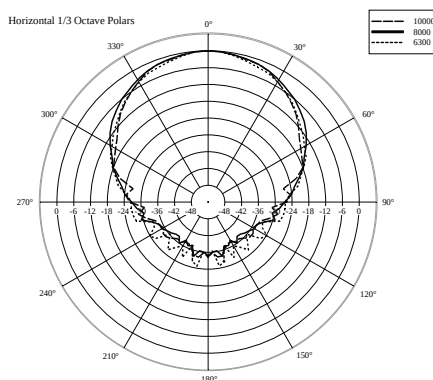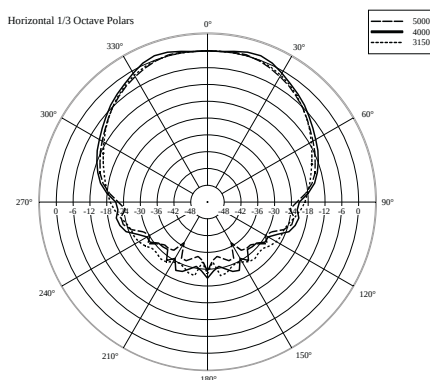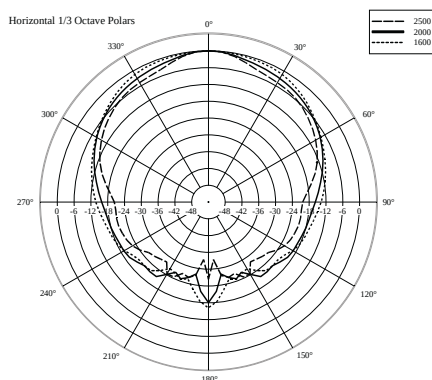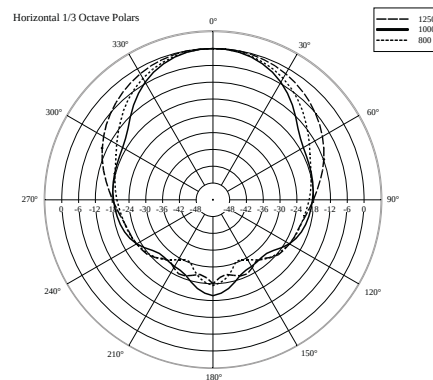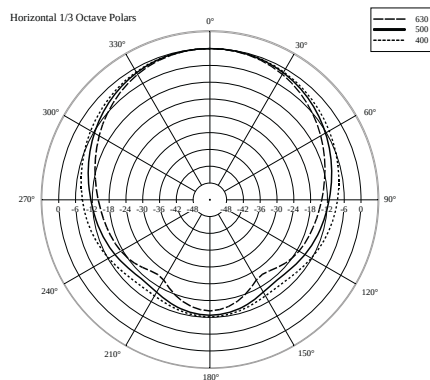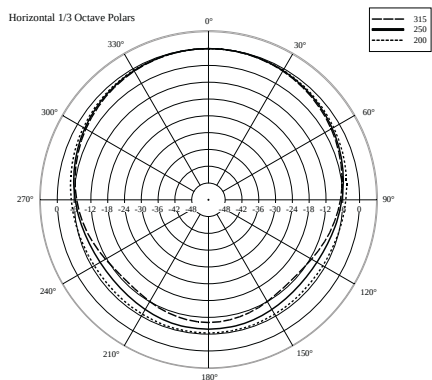



ACCESSORIES



AC P15 A-BR CLUSTER BRACK.- P6215/P3115

PART NUMBER **13360094**
EAN: 8024530006105