



NXL 14-A

COMPACT ACTIVE POINT SOURCE SPEAKER



Description

NXL 14-A is the most compact active speaker in the professional NXL series. It features two 6" woofers in a symmetrical configuration and the new 1.75" Precision Transducers PKX driver loaded on a rotatable TRW waveguide, all powered by a 2,100W two-channel amplifier. Available in black or white finish, the NXL 14-A is designed to deliver definition, power, and portability in any live application. Perfect for vocal reproduction, ideal in compact live systems paired with SUB Series subwoofers, in immersive setups, or as a fill speaker.

Features

- › 128 dB max SPL
- › 2100W Class-D Bi-Amplification
- › 70-20000 Hz linear frequency range
- › 1.75" PKX / Neodymium Compression Driver
- › 2 x 6" High Power Neodymium Woofers
- › Rotatable 100° x 70° TRW Waveguide
- › FIRPHASE and Bass Motion Control

Part Number


13000888 NXL 14-A	220-240 V	Black - RAL 9005	EAN 8024530022006
13000891 NXL 14-A W	220-240 V	White - RAL 9003	EAN 8024530022013
13000892 NXL 14-A	100-120 V	Black - RAL 9005	EAN 8024530022204
13000893 NXL 14-A W	100-120 V	White - RAL 9003	EAN 8024530022211



NXL 14-A

COMPACT ACTIVE POINT SOURCE SPEAKER

Line Art 2D

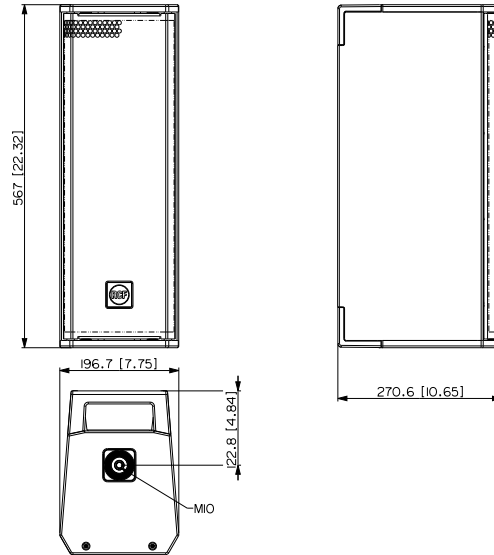

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	70 Hz ÷ 20000 Hz
	Max SPL @ 1m	128 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	70°
Transducers	Compression Driver	1 x 1.0" neo, 1.75" v.c
	Woofer	2 x 6.0" neo, 2.0" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	Combo XLR/Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	1200
	Protections	Excurs.
	Limiter	Fast Limiter
	Controls	Linear/Boost/Stage Presets, Volume.
Power section	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Plywood
	Hardware	2X M10 TOP AND BOTTOM 2X PIN D.10
	Handles	2 TOP AND BOTTOM
	Pole mount/Cap	Quick-fit socket
	Grille	Steel
	Color	Black - RAL 9005, White - RAL 9003



NXL 14-A

COMPACT ACTIVE POINT SOURCE SPEAKER

Size / Weight	Height	567 mm / 22.32 inches
	Width	197 mm / 7.76 inches
	Depth	270 mm / 10.63 inches
	Weight	12.8 kg / 28.22 lbs

ACCESSORIES

Rigging / Mounting

FLOOR STANDS

13360109 AC PRO-FS	Black	EAN 8024530006471
--------------------	-------	-------------------

HORIZONTAL BRACKETS

13360683 HBR60683	Black	EAN 8024530022518
-------------------	-------	-------------------

13360684 HBR60684	White	EAN 8024530022525
-------------------	-------	-------------------

13360681 VBR60681	Black	EAN 8024530022532
-------------------	-------	-------------------

13360682 VBR60682	White	EAN 8024530022549
-------------------	-------	-------------------

POLE MOUNT KITS

13360232 AC PMX		EAN 8024530010058
-----------------	--	-------------------

13360110 AC PRO-PM	Black	EAN 8024530006488
--------------------	-------	-------------------

13360678 PMK60678	Black	EAN 8024530022563
-------------------	-------	-------------------

13360679 PMK60679	White	EAN 8024530022570
-------------------	-------	-------------------

13360638 PM-KIT M20	White	EAN 8024530022303
---------------------	-------	-------------------

13360067 PM-KIT M20	Black	EAN 8024530014599
---------------------	-------	-------------------

13360458 PM-KIT TT 515	Black	EAN 8024530018955
------------------------	-------	-------------------

Protections

BAGS

13360685 CVR60685	Black	EAN 8024530022556
-------------------	-------	-------------------

Cables

CABLES KIT

13360102 AC XLR 3M3F		EAN 8024530006402
----------------------	--	-------------------