

# MX 3500/6

# AMPLIFIED MASTER UNIT

#### **DESCRIPTION**

MX 3500 is the master unit of the Voice Alarm system DXT 3000, dedicated to small and medium size applications where an EN 54-16 certified system is required. It is equipped with powerful and exceptionally reliable Class D power amplifiers, able to provide up to 500 W of total power. Depending on the model, it is able to serve up to 6 independent zones. Moreover, the spare power amplifier facility is also available. The internal power supply is certified EN 54-4, and the back-up batteries can be host inside the cabinet, making the system a complete and extremely compact solution. Moreover, the on-board DSP platform allows optimizing environmental equalization, maximizing voice intelligibility and background music performance. The system can be completed with emergency microphone consoles BM 3804. BM 3804FM and ME 3801, and the buttons extensions BE 3806, allowing to add live announcements functionality.



#### **FEATURES**

- 500 W total power
- Up to 6 zones controlled
- DSP platform on-board
- Certified EN 54-16 and EN 54-4
- Emergency messages on monitored SD card
- Spare power amplifier facility
- Integrated audio source on front panel
- Wall mount or rack mount installation

Rev. X Last update: 03/03/2023



#### **TECHNICAL SPECIFICATIONS**

System specifications	Number of zones managed:	6
	Built-in power amplifier:	Yes
	Spare amplifier automatic change-over:	Yes
	Max number of consoles:	4
	Number of console buses:	1
	Number of simultaneous emergency audio channels:	1
	Max number of units connectable:	8
	Communication bus:	Serial
	Connection Cables:	J-Type fire-rated
	Integrated pre-recorded emergency messages:	Yes
Amplifier specifications	Amplifier Class:	
Ampimer specifications	Number of channels:	
		6
	Power output (@ 100 V):	500 W RMS
	A/B speakers line:	Yes
	Frequency Response (-3dB):	80 Hz ÷ 16 kHz
	Signal/noise rate ("A" weighted)	>98 dB
	Distortion (THD+N) @ 1 kHz nominal power:	<0.3 %
Input section	Total number of inputs:	3
	Balanced:	3
	Mono:	3
	Line inputs:	2
	Line connectors:	Euroblock, JACK
	VOX:	Yes
	Paging inputs:	1
	Paging connectors:	Euroblock
	Paging command:	Serial
	Paging emergency:	Yes
	General Purpose Inputs (GPI):	6
	Monitored GPI:	6
	Photo-coupled GPI:	6
Output section	Signal output number:	1
-	Signal output connectors:	JACK
	Power output lines:	6
	Power output connectors:	Euroblock
	General Purpose Outputs (GPO):	6
Processing	DSP:	Yes
	Tone controls:	Yes
	High-pass filter:	20 Hz ÷ 500 Hz
Controls	Configuration:	DIP switch, Front panel
	Chime tone:	Yes



Short circuit: Yes   Thermal: Yes   DC: Yes   Fuses: Yes	Protections	Cooling:	Convection
DC:   Fuses:   Yes   Yes			Yes
Fuses: Yes   Yes     VHF (Very High Frequencies): Yes     Audio sources		Thermal:	Yes
VHF (Very High Frequencies): Yes		DC:	Yes
Audio sources         USB pen drives: SD card:         Yes           Power requirement         Operating voltage: Voltage selection: DC power: PC power value: Power consumption:         220-240/II5 V-50/60Hz           Standard compliance         IP protection grade: Safety agency: EN54-I6 certified: EN54-4 certified: CPR number:         IP 30 CE compliant           Physical specifications         Cabinet/Case Material: Color: Rack mounting:         Metal White           Size         Height: Width: Depth: Weight:         620 mm / 24.41 inches 430 mm / 16.93 inches Depth: Weight:           Shipping Information         Package Height: Package Width: Package Depth:         340 mm / 13.39 inches 680 mm / 26.77 inches 680 mm / 26.77 inches           Shipping Information         Package Depth: Package Depth:         500 mm / 19.69 inches		Fuses:	Yes
Power requirement		VHF (Very High Frequencies):	Yes
Power requirement	Audio sources	USB pen drives:	Yes
Voltage selection:		SD card:	Yes
DC power:   Yes	Power requirement	Operating voltage:	220-240/115 V~ 50/60Hz
DC power value: Power consumption:  Standard compliance  IP protection grade: Safety agency: EN54-16 certified: EN54-4 certified: Yes CPR number:  Color: Rack mounting:  Height: Depth:		Voltage selection:	Internal
Power consumption: 700 W		DC power:	Yes
Standard compliance         IP protection grade:         IP 30           Safety agency:         CE compliant           EN54-16 certified:         Yes           EN54-4 certified:         Yes           CPR number:         0068-CPR-007/2015           Physical specifications         Cabinet/Case Material:         Metal           Color:         White           Rack mounting:         19", 14U           Size         Height:         620 mm / 24.41 inches           Width:         430 mm / 16.93 inches           Depth:         230 mm / 9.06 inches           Weight:         22 kg / 48.5 lbs           Shipping information         Package Height:         340 mm / 13.39 inches           Package Width:         680 mm / 26.77 inches           Package Depth:         500 mm / 19.69 inches		DC power value:	48 V
Safety agency:   CE compliant		Power consumption:	700 W
EN54-16 certified: Yes     EN54-4 certified: Yes     CPR number: 0068-CPR-007/2015	Standard compliance	IP protection grade:	IP 30
EN54-4 certified: Yes   CPR number: 0068-CPR-007/2015		Safety agency:	CE compliant
Physical specifications         Cabinet/Case Material:         Metal           Color:         White           Rack mounting:         19", 14U           Size         Height:         620 mm / 24.41 inches           Width:         430 mm / 16.93 inches           Depth:         230 mm / 9.06 inches           Weight:         22 kg / 48.5 lbs           Shipping information         Package Height:         340 mm / 13.39 inches           Package Width:         680 mm / 26.77 inches           Package Depth:         500 mm / 19.69 inches		EN54-16 certified:	Yes
Physical specifications Color: Rack mounting:  Height: Width: Depth: Depth: Weight: Weight:  Shipping information Package Height: Package Depth:  Metal  Metal  Metal  Metal  Metal  Advant  Sepacage Midte  Advant		EN54-4 certified:	Yes
Color:       White         Rack mounting:       19", 14U         Size       Height:       620 mm / 24.41 inches         Width:       430 mm / 16.93 inches         Depth:       230 mm / 9.06 inches         Weight:       22 kg / 48.5 lbs         Shipping information       Package Height:       340 mm / 13.39 inches         Package Width:       680 mm / 26.77 inches         Package Depth:       500 mm / 19.69 inches		CPR number:	0068-CPR-007/2015
Size       Height:       620 mm / 24.41 inches         Width:       430 mm / 16.93 inches         Depth:       230 mm / 9.06 inches         Weight:       22 kg / 48.5 lbs         Shipping information       Package Height:       340 mm / 13.39 inches         Package Width:       680 mm / 26.77 inches         Package Depth:       500 mm / 19.69 inches	Physical specifications	Cabinet/Case Material:	Metal
Size       Height:       620 mm / 24.41 inches         Width:       430 mm / 16.93 inches         Depth:       230 mm / 9.06 inches         Weight:       22 kg / 48.5 lbs         Shipping information       Package Height:       340 mm / 13.39 inches         Package Width:       680 mm / 26.77 inches         Package Depth:       500 mm / 19.69 inches		Color:	White
Width:       430 mm / 16.93 inches         Depth:       230 mm / 9.06 inches         Weight:       22 kg / 48.5 lbs         Shipping information       Package Height:       340 mm / 13.39 inches         Package Width:       680 mm / 26.77 inches         Package Depth:       500 mm / 19.69 inches		Rack mounting:	19", 14U
Depth:       230 mm / 9.06 inches         Weight:       22 kg / 48.5 lbs         Shipping information       Package Height:       340 mm / 13.39 inches         Package Width:       680 mm / 26.77 inches         Package Depth:       500 mm / 19.69 inches	Size	Height:	620 mm / 24.41 inches
Weight: 22 kg / 48.5 lbs  Shipping information Package Height: 340 mm / 13.39 inches Package Width: 680 mm / 26.77 inches Package Depth: 500 mm / 19.69 inches		Width:	430 mm / 16.93 inches
Shipping information Package Height: Package Width: Package Depth:  500 mm / 19.69 inches		Depth:	230 mm / 9.06 inches
Package Width: 680 mm / 26.77 inches Package Depth: 500 mm / 19.69 inches		Weight:	22 kg / 48.5 lbs
Package Depth: 500 mm / 19.69 inches	Shipping information	Package Height:	340 mm / 13.39 inches
		Package Width:	680 mm / 26.77 inches
Package Weight: 25.8 kg / 56.88 lbs		Package Depth:	500 mm / 19.69 inches
		Package Weight:	25.8 kg / 56.88 lbs

# **PART NUMBER**


· 12100011

MX 3500/6

EAN 8024530014711




# **DRAWINGS**

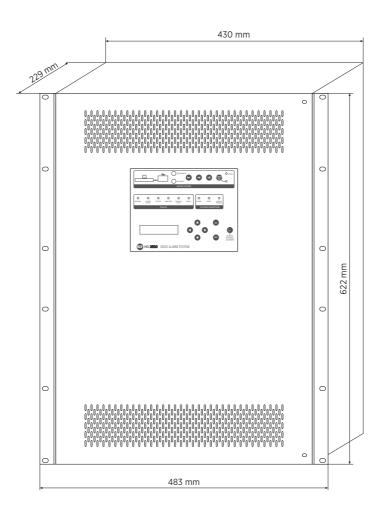


# **PANELS**

Front panel

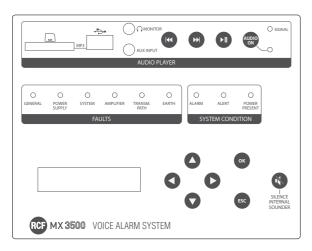

Internal connections

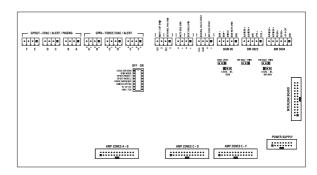



# **ACCESSORIES**

1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	BATT 18AH 2X PAIR OF BATTERIES 12V 18AH EVAC SYS	PART NUMBER EAN:	<b>13360317</b> 8024530015923
	BE 3806 ADDITIONAL KEYBOARD	PART NUMBER EAN:	<b>14380036</b> 8024530012120
	BM 3022 PREAMPLIFIED MIC CONSOLE	PART NUMBER EAN:	<b>14322013</b> 8024530007034
	BM 3804 EMERGENCY MIC CONSOLE	PART NUMBER EAN:	<b>14380028</b> 8024530012137
	BM 3804FM FIREMEN EMERGENCY MIC CONSOLE	PART NUMBER EAN:	<b>14380037</b> 8024530012885
	CJ 428CAT CABLE FTP 4x2x22 AWG CAT 5E FR (PH120)	PART NUMBER EAN:	<b>12399047</b> 8024530016449
	EOL 3-9 END OF LINE DXT3000 - DXT9000	PART NUMBER EAN:	<b>17170176</b> 8024530011864
	IE 3008 INTERLINK BOARD DXT 3000	PART NUMBER EAN:	<b>12399015</b> 8024530015152
	IT 3010 TRANSFORMERS BOARD DXT 3000	PART NUMBER EAN:	<b>12399049</b> 8024530016388





ME 3801 EMERGENCY MICROPHONE

PART NUMBER

14322030

EAN: 8024530015732



MG 3006 MONITORED GPI BOARD

PART NUMBER **13360344** 

EAN:

8024530013356



#### **A&E SPECIFICATIONS**

The product shall be the master unit of the voice alarm system, dedicated to small and medium size applications where an EN 54-16 certified system is required.

It shall be equipped with powerful and exceptionally reliable 'Class D' power amplifiers, able to provide a total power up to 500 W.

Amplifier outputs shall be 100 V / 70 V (for constant voltage speaker lines).

Each zone shall have two outputs to get redundant lines.

It shall be able to serve up to 6 independent zones. Moreover, the last internal amplifier can be alternatively used as spare (with automatic change-

The internal power supply shall be EN 54-4 certified and the backup batteries shall be hosted inside the cabinet, making the system a complete and extremely compact solution.

A on-board DSP allows to optimize the equalization and get the best voice intelligibility and background music performance.

The system can be completed with emergency microphone consoles, allowing to add live announcements functionality.

A simple MP3 player shall be present on its front panel, having an additional aux input for external audio sources.

The master unit shall have an internal slot for an optional 'interlink' board for linking up to 8 master units one another.