

P 8015S

WEATHERPROOF SUBWOOFER

DESCRIPTION

P 8015S is a weatherproof bass reflex subwoofer equipped with a 15" low-frequency neodymium transducer with a 4" voice coil offering power and efficiency for a variety of professional outdoor or indoor applications. The P 8015S has been specifically designed to reinforce the low-frequency range in P Series speakers array systems. The single-piece roto-molded cabinet is fully UV protected and meets IP-55 standard requirements (International Protection Rating), equipped with M10 brass inserts (12x) and a durable and corrosion-resistant stainless steel U-Bracket and spacers (2x) for 90° mounting. The aluminum grille cover is powder coated with a water-repellent fabric backing.



FEATURES

- 800 W RMS power handling
- 132 dB max SPL
- 50 Hz ÷ 200 Hz frequency range
- 15" neodymium woofer, 4.0" v.c.
- Weatherproof IP55 cabinet with UV protection
- Aluminum grille
- AISI 316L stainless steel bracket
- 12 suspension points (M10)

TECHNICAL SPECIFICATIONS



Acoustical specifications	Frequency Response (-10dB)	50 Hz ÷ 200 Hz
	Max SPL @ 1m	132 dB
	System Sensitivity	97 dB
Power section	Amplification	Full Range
	Nominal Impedance	8 ohm
	Power Handling	800 W
	Peak Power Handling	3200 W PEAK
Transducers	Woofers	15" neo, 4.0" v.c
Input/Output section	Input connectors	Neoprene Cable
Standard compliance	IP protection grade	IP 55
	Safety agency	CE compliant
Physical specifications	Hardware	12 x M10 + U bracket and pair of spacers
	Color	Black
Size	Height	463 mm / 18.23 inches
	Width	463 mm / 18.23 inches
	Depth	433 mm / 17.05 inches
	Weight	16.5 kg / 36.38 lbs
Shipping information	Package Height	519 mm / 20.43 inches
	Package Width	489 mm / 19.25 inches
	Package Depth	489 mm / 19.25 inches
	Package Weight	21.5 kg / 47.4 lbs

PART NUMBER

- **13000230**

P 8015S

EAN 8024530008819

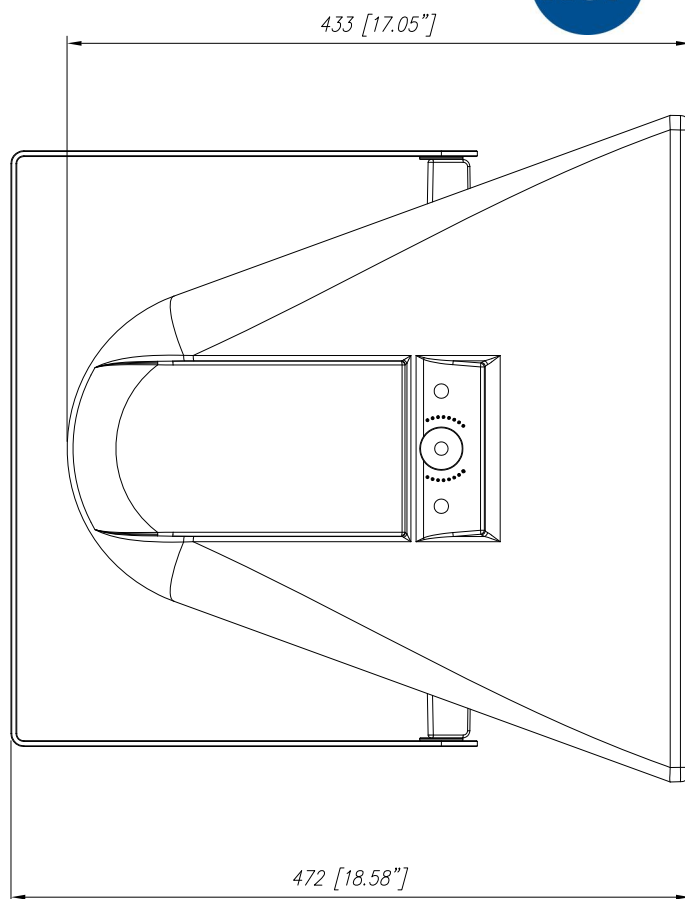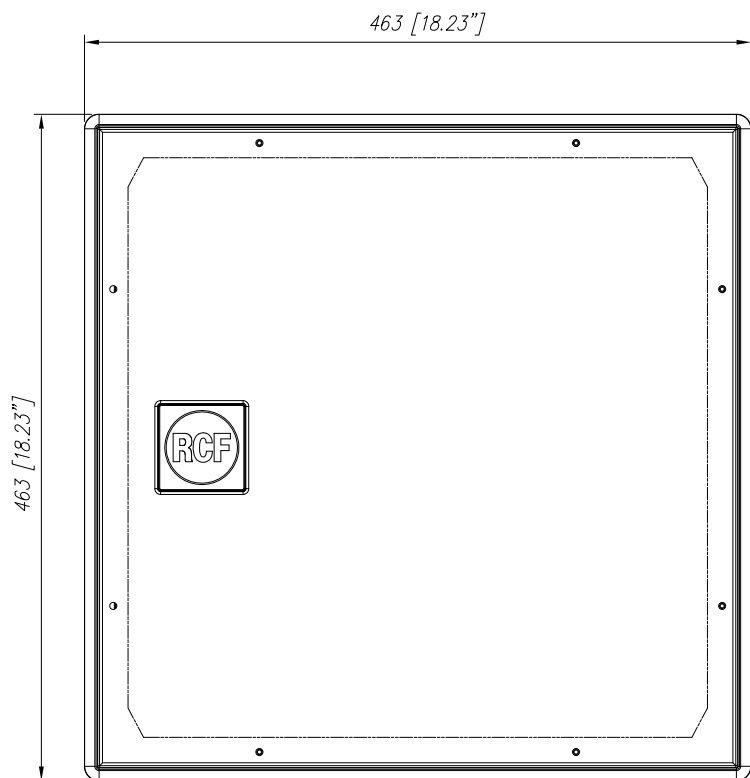

P3115

P6215

P8015

