



SUB 708-AS MK3

ACTIVE SUBWOOFER



Description The SUB 708-AS mk3 is a portable 18" high-power active subwoofer for live sound applications. It features a state-of-the-art transducer with a high-power ceramic magnetic circuit and a powerful Class-D amplifier that delivers sound pressure levels up to 133 dB with exceptional headroom. Designed as the ideal complement for 8" or 10" loudspeakers, it provides outstanding performance in any application. Rear panel controls include volume, EQ, polarity, and crossover frequency selection. The rugged all-wood cabinet with scratch-resistant polyurea coating makes it durable, easy to carry and install securely. With its versatility, sound quality, and high power output, the SUB 708-AS MK3 is perfect for small to mid-sized venues and portable applications.


- Features**
- › 1400 Watt Class-D Amplifier
 - › 18" Woofer, bass reflex housing
 - › Stereo Crossover
 - › Switchable Crossover Frequencies
 - › Polarity-reverse switch
 - › Electronic equalization, soft limiter and protection
 - › Stereo XLR input, Stereo XLR signal output
 - › Bass Motion Control excursion management

Part Number	13000809 SUB 708-AS MK3	220-240 V	Black	EAN 8024530020491
	13000810 SUB 708-AS MK3	100-120 V	Black	EAN 8024530021368

SUB 708-AS MK3

ACTIVE SUBWOOFER

Line Art 2D

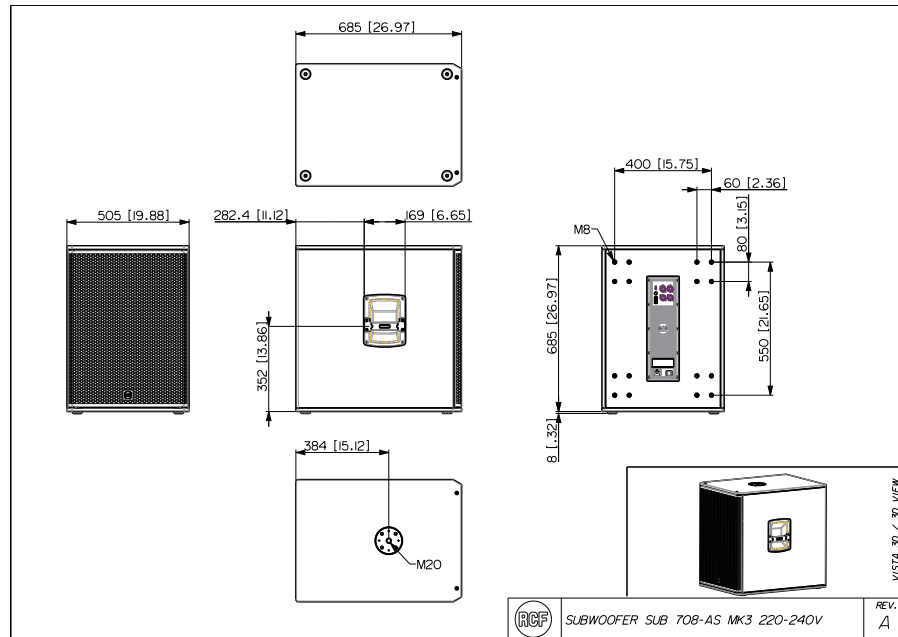

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	35 Hz ÷ 120 Hz	
	Max SPL @ 1m	133 dB	
Transducers	Woofer	1 x 18", 3.0" v.c	
Input/Output section	Input signal	bal/unbal	
	Input connectors	XLR	
	Output connectors	XLR	
	Input sensitivity	-2 dBu/+4 dBu	
Processor section	Hi-Pass Frequencies	110 Hz	
	Low-Pass Frequencies	80 Hz	
	Protections	Thermal, RMS	
	Limiter	Soft Limiter	
	Controls	Volume, EQ, Phase, Xover	
Power section	Total Power	1400 W Peak, 700 W RMS	
	Low frequencies	1400 W Peak, 700 W RMS	
	Cooling	Convection	
	Connections	VDE	
Standard compliance	Safety agency	CE compliant	
Physical specifications	Handles	One each side	
	Pole mount/Cap	Yes	
	Color	Black	
Size	Height	693 mm / 27.28 inches	
	Width	505 mm / 19.88 inches	
	Depth	685 mm / 26.97 inches	
	Weight	40.6 kg / 89.51 lbs	
	ACCESSORIES		
Protections	CVR 003	13360530	8024530020422
Rigging / Mounting	PM-KIT M20	13360067	8024530014599
Transportation	WH PRO 4X	13360238	8024530018320