


IT 3010

TRANSFORMERS BOARD

DESCRIPTION

IT 3010 is an additional board for DXT 3000 Voice Alarm system to be used only in combination with IE 3008 interlink board. Thanks to its six line transformers, it is helpful in all those installations where audio signal may be affected by high noises along system's units connections. Moreover, it offers the possibility to connect DXT 3000 units using both removable screw terminals and RJ 45 plugs, improving installation efficiency and flexibility.

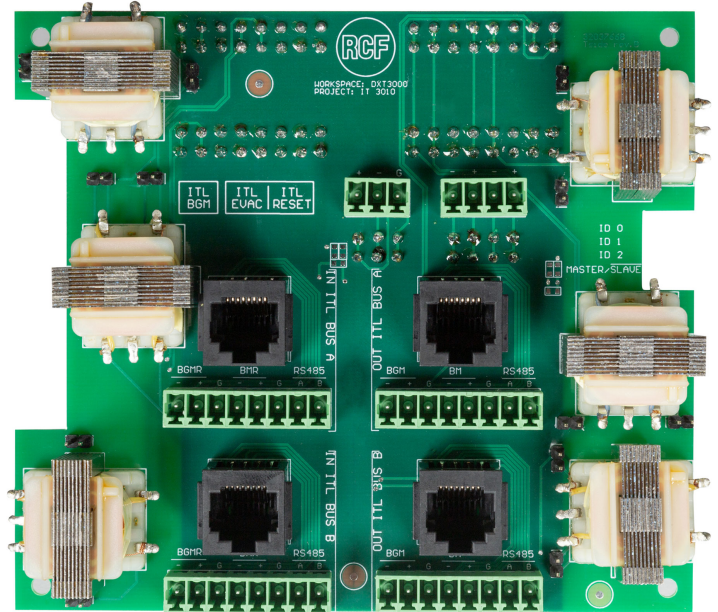

FEATURES

- Installation on IE 3008
- 6 line transformers
- Screw or RJ 45 connectors
- Power supply not required

**TECHNICAL SPECIFICATIONS**

General specifications	Number of audio channels:	2
	General Purpose Inputs (GPI):	2 (EVAC / RESET)
	Photo-coupled GPI:	2
	Max distance between first-last unit:	800 m
	Inputs / Outputs Connectors:	Euroblock or RJ 45
<hr/>		
Standard compliance	Safety agency:	CE compliant
<hr/>		
Size	Width:	130 mm / 5.12 inches
	Depth:	115 mm / 4.53 inches
	Weight:	0.28 kg / 0.62 lbs
<hr/>		
Shipping information	Package Height:	74 mm / 2.91 inches
	Package Width:	204 mm / 8.03 inches
	Package Depth:	142 mm / 5.59 inches
	Package Weight:	0.48 kg / 1.06 lbs

PART NUMBER

- **12399049**

IT 3010

EAN 8024530016388