

# VSA 1250 II

## DIGITALLY STEERABLE COLUMN SPEAKER

### DESCRIPTION

The VSA 1250 II is a multi-amplified vertical steerable array that represents one of the latest RCF applications in terms of digital audio technology. Thanks to powerful DSPs it processes the audio signal sent to each speaker for controlling its vertical acoustic dispersion to address the audio signal exactly to the listening area, avoiding to send the acoustic energy to ceilings and empty floors, thus not introducing bad reflections that would affect speech intelligibility, mainly in critical environments with high reverberation time. Full RDNet compatibility.



### FEATURES

- 12 x Class D, 50 W amplifiers
- 94 dB Max SPL (@ 30 m)
- 12 x 3.5" full range neo speakers
- 48 kHz 32 bit signal processing
- Horizontal dispersion 130°
- Vertical Coverage Beam from 10° to 30°
- Vertical Steering from 0° to -40°
- Standard installation accessories included
- Extruded aluminium body
- Indicators and control for EN 60849 monitoring facility

**TECHNICAL SPECIFICATIONS**

<b>Acoustical specifications</b>	Frequency Response:	120 Hz ÷ 18000 Hz
	Max SPL @ 30m:	94 dB
	Horizontal coverage angle:	130°
	Vertical coverage angle:	30°
<b>Transducers</b>	Fullrange:	12 x 3.5" neo, 1.0" v.c
<b>Input/Output section</b>	Input signal:	bal/unbal
	Input connectors:	Ceramic screw terminals
	Input sensitivity:	0 dBu
<b>Processor section</b>	Protections:	Thermal, short circuit
	Limiter:	Soft Limiter
	RNet:	Yes
<b>Power section</b>	Total Power:	1300 W Peak, 650 W RMS
	Cooling:	Convection
	Connections:	VDE
<b>Standard compliance</b>	CE marking:	Yes
<b>Physical specifications</b>	Cabinet/Case Material:	Aluminium
	Hardware:	2 x wall mounting flange
	Color:	White - RAL 9003, Black - RAL 9005, Custom color
<b>Size</b>	Height:	1340 mm / 52.76 inches
	Width:	125 mm / 4.92 inches
	Depth:	97 mm / 3.82 inches
	Weight:	13.8 kg / 30.42 lbs
<b>Shipping informations</b>	Package Height:	169 mm / 6.65 inches
	Package Width:	1534 mm / 60.39 inches
	Package Depth:	189 mm / 7.44 inches
	Package Weight:	15.8 kg / 34.83 lbs



**PART NUMBER**

• **13100056**

VSA 1250 II B  
115V, Black - RAL 9005  
EAN 8024530018139

• **13100027**

VSA 1250 II  
220-240V, Custom color  
EAN 8024530016043

• **13100055**

VSA 1250 II B  
220-240V, Black - RAL 9005  
EAN 8024530018122

• **13100026**

VSA 1250 II  
115V, White - RAL 9003  
EAN 8024530016036

• **13100032**

VSA 1250 II  
115V, Custom color  
EAN 8024530016098

• **13100025**

VSA 1250 II  
220-240V, White - RAL  
9003  
EAN 8024530016029



**DRAWINGS**

**FRONT VIEW**

**SIDE VIEW**

**REAR VIEW**

**VSA 2050 II**

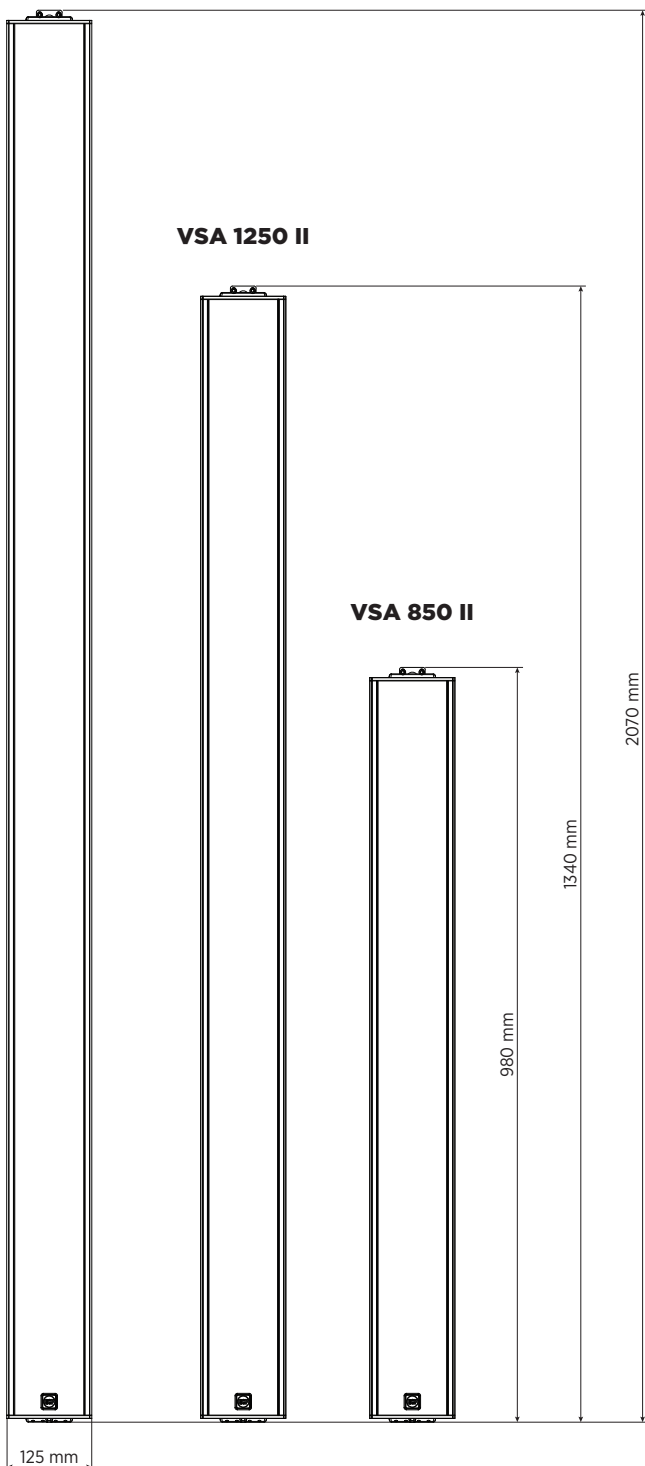

97 mm  
104 mm Including bracket

**ACCESSORIES**

SWIVEL BRACKET SWM-BR VSA II

PART NUMBER

**13360410**

EAN:

8024530016111



SWIVEL BRACKET SWM-BR VSA II BLACK

PART NUMBER

**13360442**

EAN:



VSA REMOTE CONTROL

PART NUMBER

**13360330**

EAN:

8024530013110



VSA TA 1000 - TRANSF. ADAPT. 100V TO ODB

PART NUMBER

**13360318**

EAN:

8024530012878