



COMPACT M 10

TWO-WAY PROFESSIONAL SPEAKER



Description

COMPACT M 10 is a multipurpose two-way full-range speaker system, suitable for a wide range of applications. Its balanced sound is a big asset in near-field applications for the best intelligibility. The M 10 features high sensitivity, typical of professional audio cabinets thanks to the use of oversized magnets and a HI-FI sound quality, with smooth and wide frequency response, thanks to the wave-guided compression driver. The SPL level of low-distortion audio the M 10 can provide goes far beyond expectations of such a compact solution. The elegant and compact design with accurate finishing makes M 10 suitable for almost any environment, even with architectural constraints. Optional mounting accessories allow using M 10 on wall or ceiling installations.

Features

- › 300 W RMS power handling
- › 128 dB max SPL
- › 60 ÷ 20000 Hz frequency range
- › 90° x 70° constant directivity coverage angle
- › 1 x 10" high power woofer
- › 1 x 1.4" voice coil compression driver
- › High quality plywood cabinet
- › Steel front grille with clothing
- › Installation points available on rear, top and bottom panels
- › 4 pole EUROBLOCK connector (audio input and parallel link output)

Part Number

13000595 COMPACT M 10
13000723 COMPACT M 10 W


Black - RAL 9005 EAN 8024530017804
White - RAL 9003 EAN 8024530019358



COMPACT M 10

TWO-WAY PROFESSIONAL SPEAKER

Line Art 2D

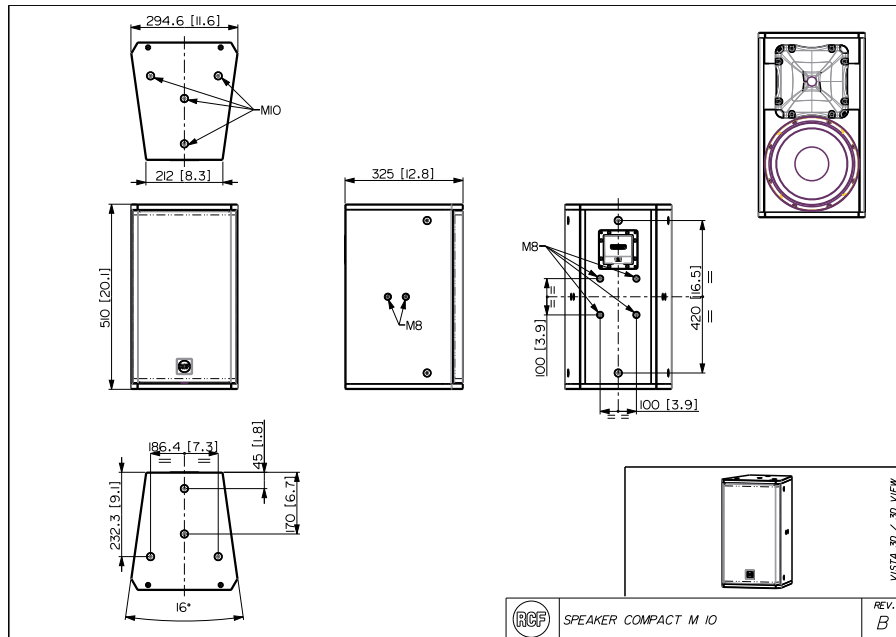

RCF SPEAKER COMPACT M 10 REV. B

Acoustical specifications

TECHNICAL SPECIFICATIONS

Frequency Response (-10dB) 60 Hz ÷ 20000 Hz
 Max SPL @ 1m 128 dB
 Horizontal coverage angle 90°
 Vertical coverage angle 70°
 Directivity index Q 9
 System Sensitivity 98 dB

Power section

Amplification Full Range
 Nominal Impedance 8 ohm
 Power Handling 300 W
 Peak Power Handling 1200 W PEAK
 Protections Dynamic active mosfet
 Crossover Frequencies 1800 Hz
 Recommended Amplifiers XPS 16K, XPS 16KD, QPS 10K, QPS 6.0K, IPS 5.0K, IPS 2.5K, IPS 1.5K, DMA 504

Transducers

Compression Driver 1 x 1.0", 1.4" v.c
 Woofer 1 x 10", 2.5" v.c

Input/Output section

Input connectors Euroblock
 Output connectors Euroblock

Standard compliance

Safety agency CE compliant

Physical specifications

Cabinet/Case Material Plywood
 Hardware 8 x M8, 8 x M10
 Grille Steel with clothing
 Color Black - RAL 9005, White - RAL 9003

Size

Height 510 mm / 20.08 inches
 Width 295 mm / 11.61 inches
 Depth 325 mm / 12.8 inches
 Weight 17 kg / 37.48 lbs

ACCESSORIES

Rigging / Mounting

H-BR 007 13360551 Black - RAL 9005 8024530021641



COMPACT M 10

TWO-WAY PROFESSIONAL SPEAKER

Rigging / Mounting	H-BR 007	13360604	White - RAL 9003	8024530021658
	SWM-BR NC	13360199		8024530007355
	V-BR 007	13360552	Black - RAL 9005	8024530021726
	V-BR 007	13360606	White - RAL 9003	8024530021733
Upgrade Kits	PNL IN-OUT AMPHENOL	12399063	Black	8024530020149
	PNL IN-OUT SPEAKON	12399062	Black - RAL 9005	8024530018733